
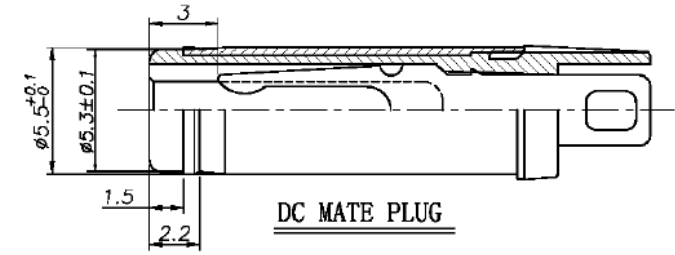
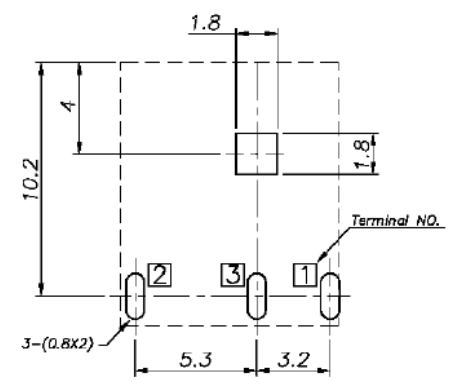
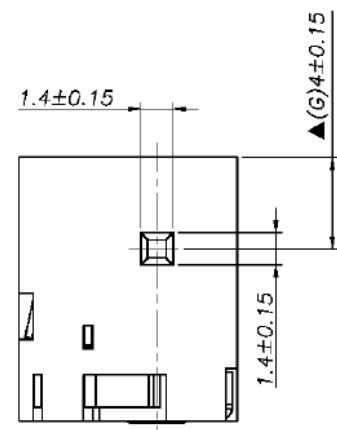


Model No.	A	B	C
PIN	ø1.65	ø2.0	ø2.5



RECOMMENDED P.C.B. LAYOUT
 UNSPECIFIED TOLERANCE: ±0.1
 (Copper-sided view)

Specification:

1. Rating : DC 25V 3A;
2. Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3. Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles min;
7. Operation temperature range: -20°C~70°C
8. Preservative temperature range: -40°C~85°C
9. Sign "▲" is importance dimension

5	Shunt terminal □	Brass t=0.3	1	Silver plating
4	Tip spring □	Phosphor Bronze t=0.3	1	Silver plating
3	Center pin contact □	Brass t=0.25	1	Silver plating
2	Center pin	Brass	1	Copper tin plating
1	Housing	PBT	1	Black
NO	PARTS NAME	MATERIAL	Q'TY	FINISHING

銓基電子股份有限公司
 ROKI ELECTRONICS CO., LTD.

PART NAME : DC JACK			SCALE :
PART NO : JD64-□-PF			UNIT : mm
TOLERANCE : ±0.3 mm			VER : R01