



Model No.	A	B	C
PIN	ø1.65	ø2.0	ø2.5

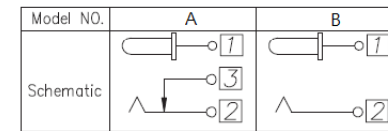

□: TERMINAL NO.

RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(COPPER-SIDED VIEW)



Specification:

1. Rating : DC 25V 3.0A;
2. Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3. Insulation resistance: ≥100MΩ (500VDC);
After test: ≥50MΩ
4. Withstanding voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles min;
7. Operation temperature range: -40°C~85°C
8. Preservative temperature range: -40°C~85°C
9. Sign "▲" is importance dimension

7	Ground shield	Phosphor Bronze t=0.2	1	Ni-plating
6	Shield plate	Stainless steel t=0.1	1	Ni-plating
5	Shunt terminal	Brass t=0.25	1	Ag-plating
4	Tip spring	Phosphor Bronze t=0.3	1	Ag-plating
3	Center pin contact	Brass t=0.25	1	Ag-plating
2	Center pin	Brass	1	Ni-plating
1	Housing	PA9T	1	Black
NO	PARTS NAME	MATERIAL	Q'TY	FINISHING


 銓基電子股份有限公司
 ROKI ELECTRONICS CO., LTD.

PART NAME : DC JACK

PART NO : JD63-□□-PF

TOLERANCE : ±0.3 mm

SCALE :

UNIT : mm

VER : R02

