




DSMR SERIES

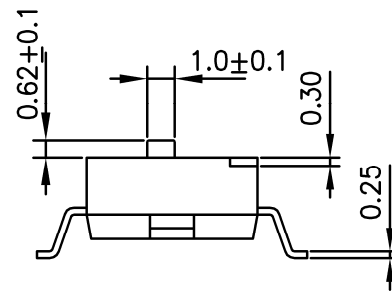

DSM SERIES

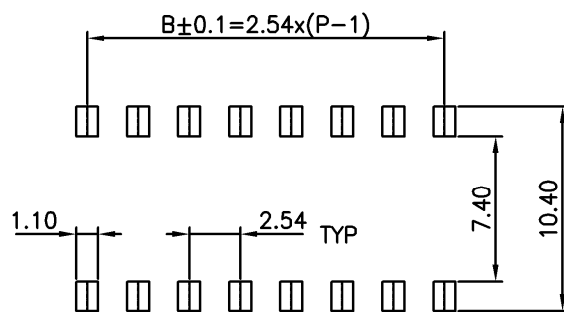


P.C.B. LAYOUT

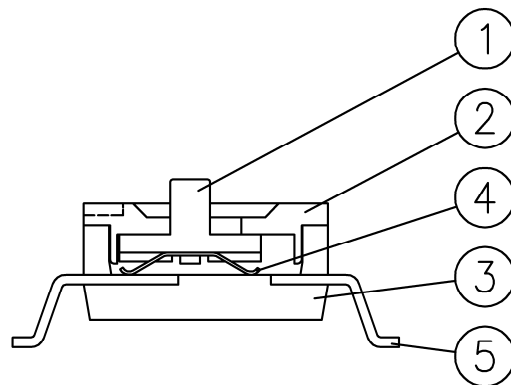

CONSTRUCTION

NO	PROD. NO.	NO. OF POS.	DIM. A	DIM. B
11	DSM-12 DSMR-12	12	31.42	27.94
10	DSM-10 DSMR-10	10	26.34	22.86
9	DSM-09 DSMR-09	9	23.80	20.32
8	DSM-08 DSMR-08	8	21.26	17.78
7	DSM-07 DSMR-07	7	18.72	15.24
6	DSM-06 DSMR-06	6	16.18	12.70
5	DSM-05 DSMR-05	5	13.64	10.16
4	DSM-04 DSMR-04	4	11.10	7.62
3	DSM-03 DSMR-03	3	8.56	5.08
2	DSM-02 DSMR-02	2	6.02	2.54

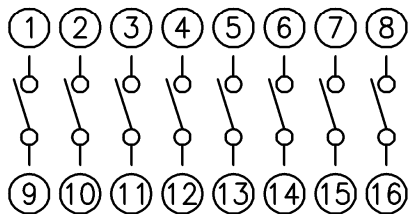

CIRCUIT DIAGRAM

TOLERANCES UNLESS OTHERWISE		5	TERMINAL	BRASS	GOLD PLATING
DIMENSION		4	CONTACT	BERYLLIUM COPPER	GOLD PLATED AT CONTACT AREA
0-4	±0.05	3	BASE	UL94V-0 NYLON	MOLDED BLACK
4-16	±0.1	2	COVER	UL94V-0 NYLON	MOLDED BLACK
16-50	±0.15	1	ACTUATOR	UL94V-0 NYLON	MOLDED WHITE
		NO	DES.	MATERIALS	TREMENT



銓基電子股份有限公司
ROKI ELECTRONICS CO., LTD.

PART NAME : DIP SWITCH

PART NO : DSM(R)-□□-PF SERIES

TOLERANCE : ±0.2 mm

SCALE :

UNIT : mm

VER : R01

